




# GRABADOR CCTV



## AVC785

### GRABADOR 8 CAMARAS MPEG4

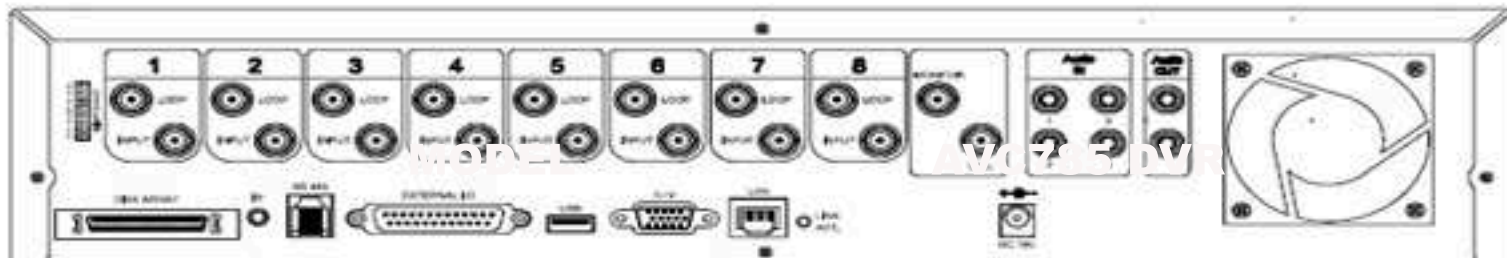

### ESPECIFICACIONES

| SPECIFICATION CONTINUED                | AVC785   |
|--|--|
| Maximum Recording Rate                 | Frame: 720 x 480 pixels with 60 FPS (NTSC) / 720 x 576 pixels with 50 FPS (PAL)<br>CIF: 352 x 240 pixels with 240 FPS (NTSC) / 352 x 288 pixels with 200 FPS (PAL) |
| Adjustable Recording Speed             | Frame: 60, 30, 15, 7 FPS <NTSC> / 50, 25, 12, 6 FPS <PAL><br>CIF: 240, 120, 60, 30 FPS <NTSC> / 200, 100, 50, 25 FPS <PAL>   |
| Image Quality Setting                  | Best, High, Normal, and Basic  |
| Hard Disk Storage                      | IDE type, ATAS, supported HDD #2, support each HDD capacity over 400GB   |
| HDD Quick Cleaning                     | Quick clean up the "Index system" of the recorded files, 260GB under 2 seconds   |
| Recording Mode                         | Manual / Timer / Motion / Alarm / Remote   |
| Watermark                              | Yes  |
| Refresh Rate                           | 240 FPS for NTSC / 200 FPS for PAL   |
| Multiplex Operation                    | Live display, record, playback, backup and network   |
| Audio I/O                              | 4 audio inputs, 2 audio outputs (Mono)   |
| Motion Detection Area                  | 16 x 12 grids per camera for all channels  |
| Motion Detect Sensitivity              | 4 adjustable variables with precise calculation for motion detection   |
| Pre-alarm Recording                    | Yes (8MB)  |
| USB Interface                          | Support USB 1.1 / 2.0 flash drives (front panel #1, back panel #1)   |
| Backup Device                          | USB 1.1 / 2.0 flash drive backup and network remote backup   |
| Web Transmitting / Compression Format  | Motion JPEG  |
| Ethernet                               | 10/100 Base-T, Support remote control and live view via Ethernet   |
| Web Interface                          | Support licensed software AP, and IE browser   |
| Remote Alarm Notification              | E-mail images, and upload images to FTP site's specific account  |
| Network Connection                     | TCP/IP, PPPoE, DHCP and DDNS   |
| Remote Control                         | Remotely control DVR and PTZ cameras via IR transmitter (RC-455)   |
| PTZ control                            | Support PELCO-D protocol   |
| Dwell Time (Sequential Channel Switch) | Programmable with adjustable dwell time  |
| Alarm I/O                              | 8 inputs, 1 output   |
| Picture Zoom                           | Support 2X digital zoom function   |
| Key Lock                               | Yes  |
| Video Loss Detection                   | Yes  |
| Camera Title                           | Support up to 6 letters  |
| Video Adjustable                       | Hue / Color / Contrast / Brightness  |
| Date Display Format                    | YYMMDD, DDMMYY, MMDDYY, and Off  |
| Daylight Saving                        | Yes  |
| Power Source                           | DC 15V   |
| Power Consumption                      | < 64 W   |
| Operating Temperature                  | 10°C ~ 40°C (50°F ~ 104°F)   |
| Dimensions (mm)                        | 422mm (W) x 90mm (H) x 226mm (D)   |
| System Recovery                        | System auto recovery after power reconnected   |
| Optional Peripherals                   | Independent disk array; VGA converter  |

\* La información puede ser cambiada sin previo aviso \*\* Tolerancia de dimensiones: +- 5 mm.