



BF5C

**Fingerprint & Pin code
Attendance & Access Controller
with Wiegand 26 Input/Output Interface**

BF5C is the contemporary and innovative fingerprint time attendance also offering unparalleled performance for physical access controller. Most physical time attendance and access security systems in use these days are based upon magnetic cards, identification numbers (IDs) and proximity cards. The disadvantage of these is the inability to detect false acceptance. This leads to frequent security breaches. Now, you can eliminate and prevent such security problems with the use of BF5C

BF5C generally supports RS485/ USB port, TCP/IP Network, and Wiegand 26 interface input/output and holds a broad compatibility to any Wiegand 26 Access Controller System. It has super FUNCTION KEYS such as IN/OUT. Besides, it has BELL button and Alarm output. With the additional sound, it gives an easy verification to users whether he/she has the right to access or not. This model is so flexible when it comes to any request for customization such as back up batteries, language customization and etc. Basically this model is very user friendly because it has many features being built in this compact design.

Application Fields:


Bursary, Bank, Army, Jail, R&D Institution, Universities, Schools, Security Management System of Government or Enterprise and any applications that require authorized fingerprint authentication to access the premises and for time attendance system..




Specification for BF5C

Sensor Size	16mm*14mm
Dimensions	220mm * 154mm * 40mm , 1KG/unit
Image Scan Time	< 0.5 seconds
Fingerprint Capture Angle	360°
Verification Speed	< 1.5 seconds (1:1000fingers)
False Acceptance Rate	< 0.00001%
False Rejection rate	< 0.001%
Matching Method	1:N or 1:n (with GROUP ID, each 100fingers in one GROUP)
Template capacity Rate	2800 fingerprint templates (Each user can have 2 fingers and 1 pin code and one card)
Backup Option, Including: RFID CARD RFIC CARD HID CARD	Fingerprint or Password or card .or Fingerprint combine with pin code or Fingerprint combine with card. One user with two fingers and one pin code and one card.
Operating Method	Standalone
Manager Log Capacity	1000 Lines
In/Out Log Capacity	51200 Lines
Communication	RS485 , Wiegand 26 Input/Output (RS232-USB Converter), TCP/IP Network
PUSH button	YES (two pins)
RELAY OUTPUT Alarm Bell output	YES (Delay time can be reset between 1 to 10 second.) The relay can be switched between control relay and Alarm relay by the software.
Time zone setting	Yes (32 time zones)
Access controller output	Wiegand 26 input/output,
Simple access controller inside	With simple controller (Build inside) 2 pins for push button Relay output to Em lock (NO,COM,NC)
Operating Humidity	20%-80%
Operating Temperature	-5°C - + 60°C
Voltage Supply	12V/DC@1.5A ,<1W
Anti-Static Capability	< 15kV
Supported Language	Chinese / Big 5 Chinese (Taiwan) English Spanish French Hungarian
Additional Features	Function Keys, In/Out buttons, Bell button,

- This model offers ONE year warranty period for manufacturing defects.

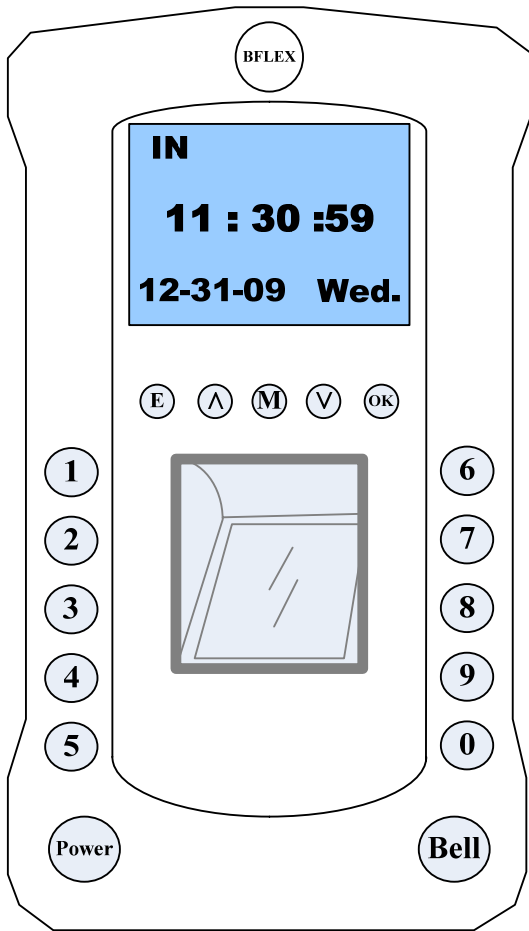

The upside of case is made by plastic
And the keypad is made by aluminum.

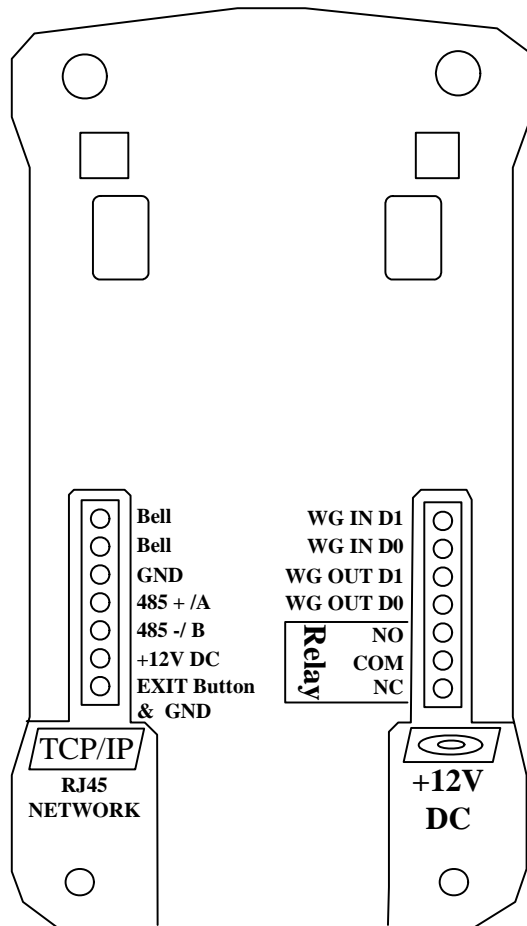

the base case is made by ZINC
or plastic (By selection)
And RJ45 Port is disable for the BF5