



RF5IPlus

**Proximity Card & Pin code
Attendance & Access Controller
with TCP/IP n Wiegand 26 Interface**

RF5IPlus is the contemporary and innovative Proximity ID card time attendance also offering unparalleled performance for physical access controller. Most physical time attendance and access security systems in use these days are based upon magnetic cards, identification numbers (IDs) and proximity cards. And lots of the end user wants to select the Proximity card reader for their project. So we Research and develop out this professional devices to offer to the correct market, that is RF5IPlus

RF5IPlus generally supports RS485/ TCP/IP and Wiegand 26 interface input/output and holds a broad compatibility to any Wiegand 26 Access Controller System. It has supper FUNCTION KEYS such as IN/OUT. Besides, it has BELL button and Alarm output. With the additional sound, it gives an easy verification to users whether he/she has the right to access or not. This model is so flexible when it comes to any request for customization such as back up batteries, language customization and etc. Basically this model is very user friendly because it has many features being built in this compact design.

Application Fields:


Bursary, Bank, Army, Jail, R&D Institution, Universities, Schools, Security Management System of Government or Enterprise and any applications that require authorized fingerprint authentication to access the premises and for time attendance system..




Specification for RF5IPlus

Antenna size	38mm*58mm
Dimensions	172mm×92mm×35mm,1kg
Scan Time	< 0.01 seconds
Scan Distance	<100mm
Verification Speed	< 1.0 seconds (1:10000cards)
Matching Method	1:N
Template capacity Rate	10000 cards -- 10000 Users (1 pin code and 1 card with one user ID)
Backup Option	Pin code or Card
Operating Method	Standalone
Manager Log Capacity	1000 Lines
In/Out Log Capacity	51200 Lines
Communication	RS485 , Wiegand 26, TCP/IP(10M/100M) (Web Ip module inside, coming with web viewer function.) (RS232-USB Converter)
PUSH button	YES (two pins)
RELAY OUTPUT Alarm Bell output	YES (Delay time can be reset in 1 to 10 second.) The relay can be switched between control relay and Alarm relay by the software.
CARD reader function	Yes RF5IPlus_ID (125KHz card) RF5IPlus_IC (13.56MHz card) RF5IPlus_HID (all kinds of HID card)
Access controller output	Wiegand 26 input/output, support all Wiegand 26 access controller and all kind of wiegand 26 card reader
Simple access controller inside	With simple controller (Build inside) 2 pins for push button Relay output to Em lock (NO,COM,NC)
Operating Humidity	20%-80%
Operating Temperature	-5°C - + 60°C
Voltage Supply	12VDC@1.5A ,<1W
Anti-Static Capability	< 40kV
Supported Language	English Spanish French Hungarian
Additional Features	Function Keys, In/Out buttons, Bell button,


- This model offers ONE year warranty period for manufacturing defects.

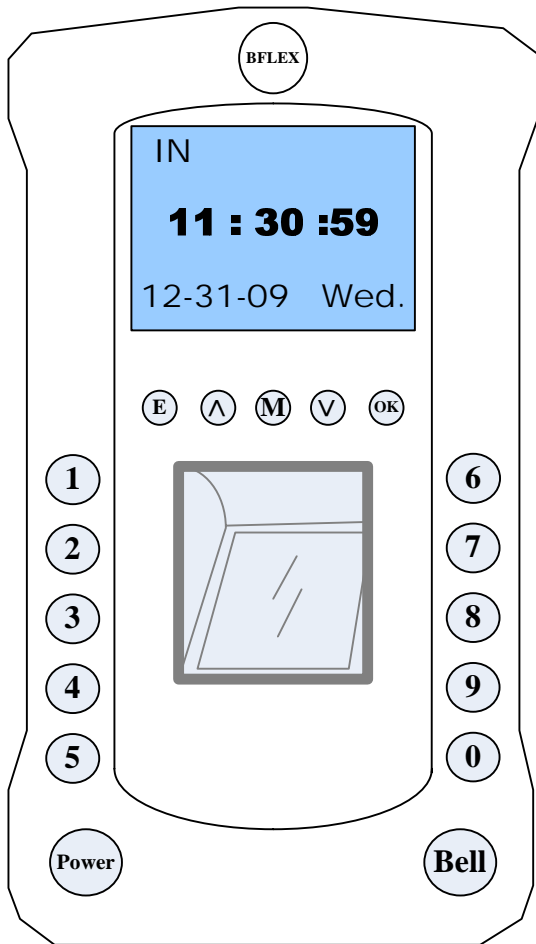

The upside of case is made by plastic
And the keypad is made by aluminum.

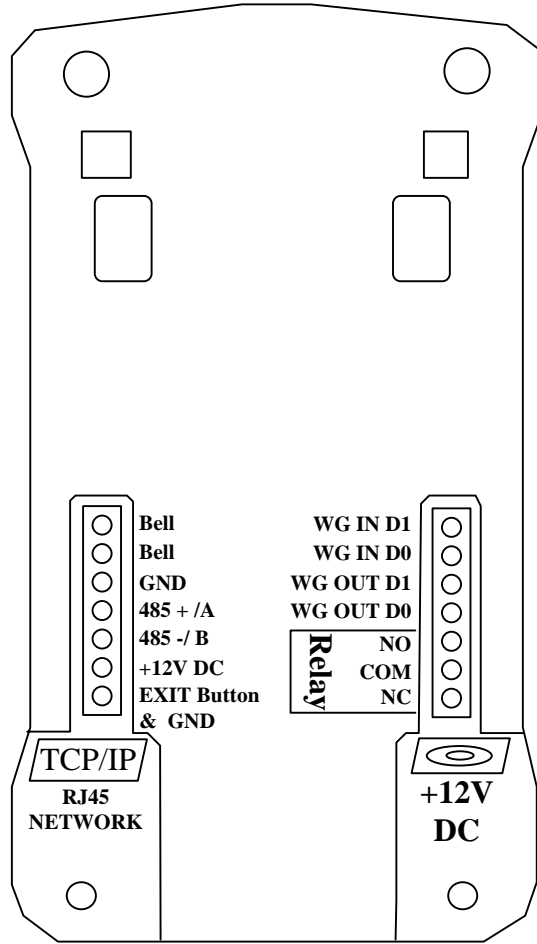

the base case is made by ZINC.

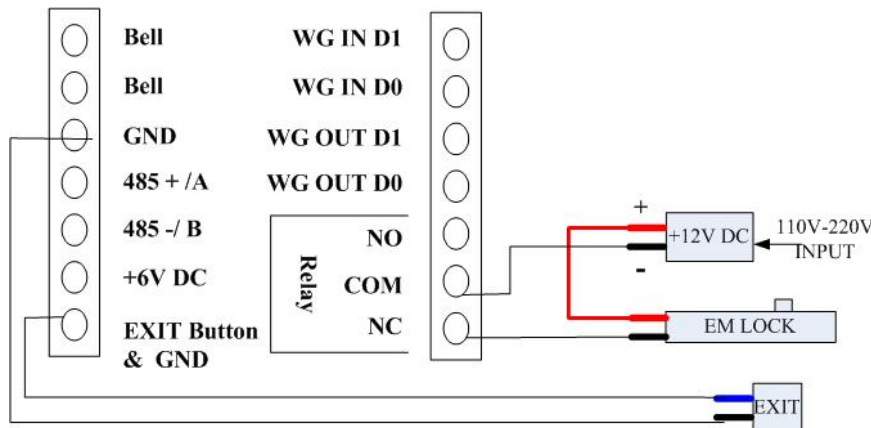


Solution A

It is easy to install. And the cost is economic.
But this solution is not very safe.

- A) When the device was taken away, the door will open
- B) When the device was out of power, the door can not be opened

Simple wiegand 26 controller

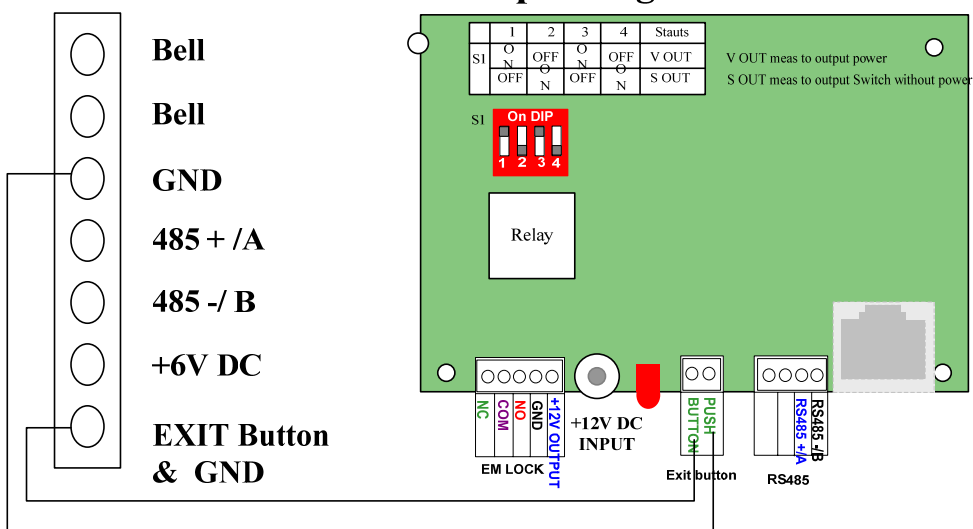


Solution B

It is the little safe solution. Because the extra controller was inside of the room. All the EMLOCK and exit button was connected with the extra controller.

A) When the device was taken away, the door will be little safe

B) When the device was out of power, the door will be safe and it can not be opened

Simple wiegand 26 controller

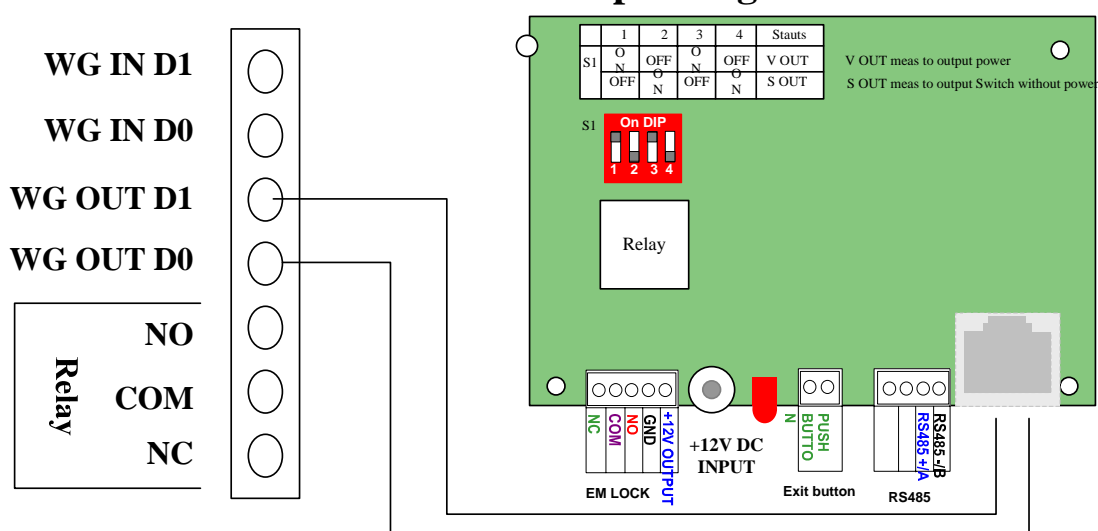


Solution C

This is the safe solution. Because the extra controller was inside of the room. The door will be safe even if the device was taken away.

All the EMLOCK and exit button was connected with the extra controller.

Only two Pins from the fingerprint device to the controller.(It is wiegand 26)

(The distance should <50M)

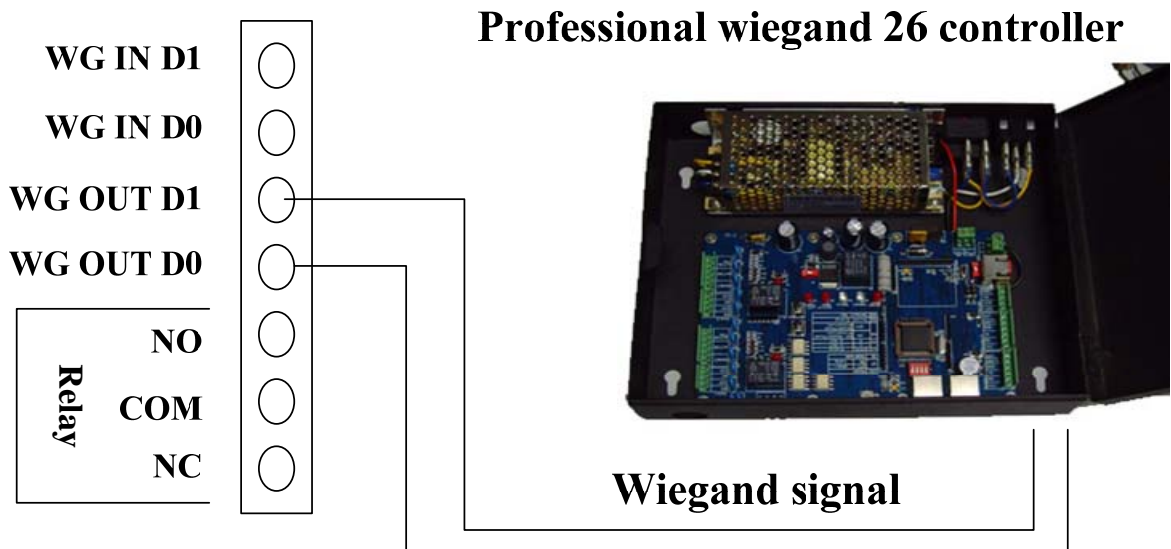

Solution D

This is the BEST safe solution. Because the extra professional controller was inside of the room. The door will be very safe even if the device was token away.

All the EMLOCK and exit button was connected with the extra controller.

Only two Pins from the fingerprint device to the controller.(It is wiegand 26)

(The distance should <50M)

And the professional controller will set authorization to each user by the registered user id, so that should be the best safe solution.